
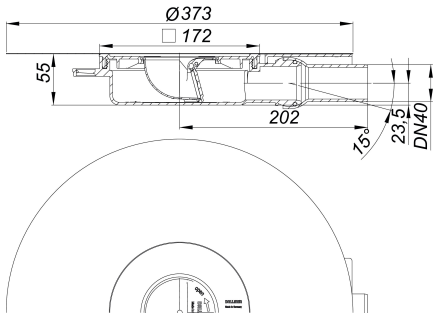


drain body DallDrain Plan DN 40

Part number: 517227  
GTIN: 4001636517227  
Rebate group: 6



Description:

drain body DallDrain Plan DN 40  
For installation with gratings DallDrain, raising piece DallDrain. Outlet DN 40 horizontal, with ball-joint, adjustable from 0 – 15 degrees.

- Specification
- Integrated screed anchoring
  - Flexible, click-in sealing sleeve for secure connection to bonded and sheet waterproofing conforming to DIN 18534
  - Fully removable mechanical odour trap and rodding eye, (deviating to DIN EN 1253)
  - Temporary blanking plate
  - Screed reinforcement element for protection of the outlet

Material  
Drain body and outlet polypropylene, highly impact-resistant

Can be used with sound insulation mat DallDrain (art. no. 517326) and  
mounting aid DallDrain Plan (art. no. 517302).

Flow rates tested to:

| Nominal diameter | Product standard | Min. flow rate according to norm | Water level according to norm | Flow rate at water level 10 mm | Flow rate at water level 20 mm | Drainage capacity |
|------------------|------------------|----------------------------------|-------------------------------|--------------------------------|--------------------------------|-------------------|
| DN 40            | DIN EN 1253      | 0.40 l/s                         | 20.00 mm                      | 0.47 l/s                       | 0.54 l/s                       | 0.54 l/s          |